

**Nista Devices Technical Support:**

**+41 55 5085814**

**support@nistadevices.com**

Documentation on all Nista Devices GmbH products can be found on the website - <http://www.nistadevices.com/>

## Configuration IP39-4x for P2P Call with GIGASET Maxwell 10

### 1. IP39-4x configuration

- IP39-4x and Maxwell phone shall be connected to the IP network with the IP addresses from the same Network subnet range.
- Enter to IP39-4x web-management interface
- Navigate to Telephony / Day and Night Settings and fill Day and Night destinations as shown on the e-mail below

**Telephony->Day and Night Settings**

Switch Mode  Auto  Manual

Manual Type Day Time

	Day Start	Day End
Sunday	09 : 45	19 : 00
Monday	09 : 45	19 : 00
Tuesday	09 : 45	19 : 00
Wednesday	09 : 45	19 : 00
Thursday	09 : 45	19 : 00
Friday	09 : 45	19 : 00
Saturday	09 : 45	19 : 00

	SIP Account	
Day Time Destination	<span style="border: 1px solid #ccc; padding: 2px;">sip:111@192.168.1.35</span>	<span style="border: 1px solid #ccc; padding: 2px;">1</span>
Night Time Destination	<span style="border: 1px solid #ccc; padding: 2px;">sip:111@192.168.1.35</span>	<span style="border: 1px solid #ccc; padding: 2px;">3</span>

- Alternatively Navigate to Telephony / Day and Night Settings and fill Day and Night destinations as shown on the e-mail below:

**Telephony->Speed Dial**

Speed Dial No. 11 Select ▲ ▼


SPD	Day Time Destination	Night Time Destination	No Answer Forward Destination	Door 1 Opening Code	Door 2 Opening Code	Description	SIP Account
11	<span style="border: 1px solid #ccc; padding: 2px;">sip:111@192.168.1.35</span>	<span style="border: 1px solid #ccc; padding: 2px;">sip:111@192.168.1.35</span>		<span style="border: 1px solid #ccc; padding: 2px;">6666</span>	<span style="border: 1px solid #ccc; padding: 2px;">7777</span>	Maxwell	<span style="border: 1px solid #ccc; padding: 2px;">1</span>
12							<span style="border: 1px solid #ccc; padding: 2px;">1</span>
13							<span style="border: 1px solid #ccc; padding: 2px;">1</span>
14							<span style="border: 1px solid #ccc; padding: 2px;">1</span>
15							<span style="border: 1px solid #ccc; padding: 2px;">1</span>
16							<span style="border: 1px solid #ccc; padding: 2px;">1</span>
17							<span style="border: 1px solid #ccc; padding: 2px;">1</span>
18							<span style="border: 1px solid #ccc; padding: 2px;">1</span>
19							<span style="border: 1px solid #ccc; padding: 2px;">1</span>
20							<span style="border: 1px solid #ccc; padding: 2px;">1</span>

Where: in string [sip:111@192.168.1.35](#)

- 192.168.1.35 – The Gigaset Maxwell 10 phone IP address


- 111 - The Gigaset Maxwell 10 phone extension ( see explanation in further in document)
2. Gigaset Maxwell 10 Configuration

- Enter to Maxwell 10 Settings screen and fill configuration fields as shown on the picture below:

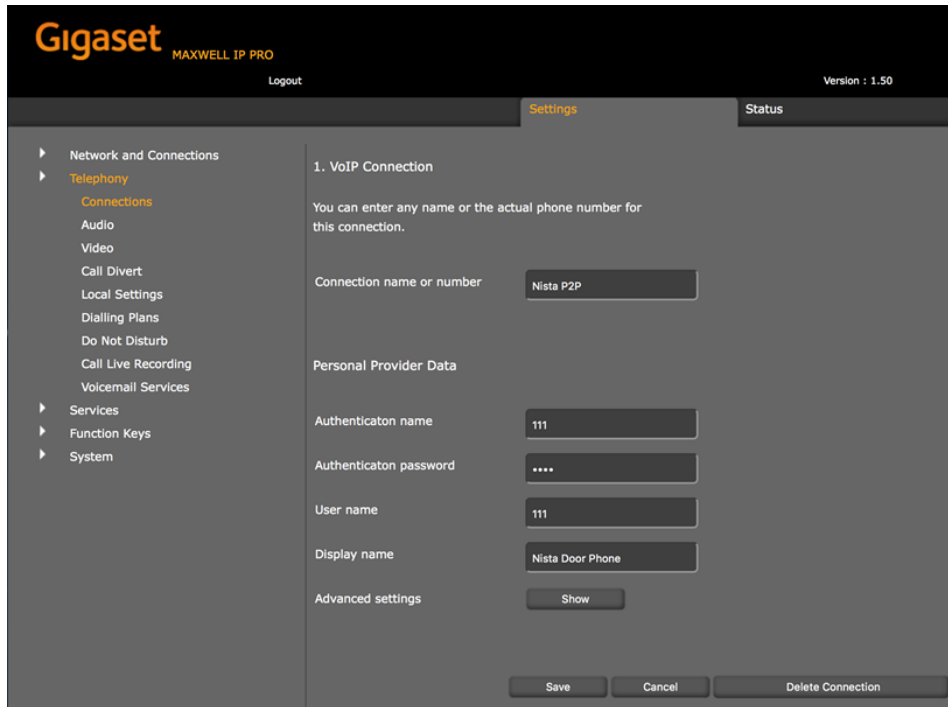

Where Authentication password is: 1234

- Enter to Maxwell 10 Advanced Settings screen and fill configuration fields as shown on the picture below:

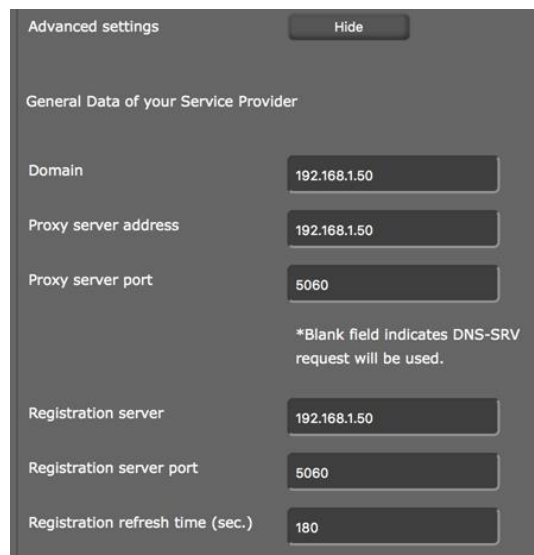

Where 192.168.1.50 – The IP39-4x Door phone IP address