

IP39-40x series Keypad Door Access Control

VoIP & SIP Video

The Nista Devices IP Door Phones are standalone SIP phones, which maximize functionality of the VoIP network. Integrated into SIP Proxy as extension, IP Door Phone allows voice and video communication and door control in multiple company branches, which are operated within single IP network. An integrated IP video camera provides real-time video streaming. Nista IP Door Phone's stylish housing blends well with the modern company designs.




IP39-40PC

- Designed as SIP proxy extension
- Multiple Doors control
- High Quality Audio
- HD video
- Door Opening from local & remote extensions
- Web-based programming interface
- Piezo Keypad
- Secure wall installation
- Stylish design
- SRTP; Media Encryption



IP Door Access Control

IP39-40x DOOR PHONE

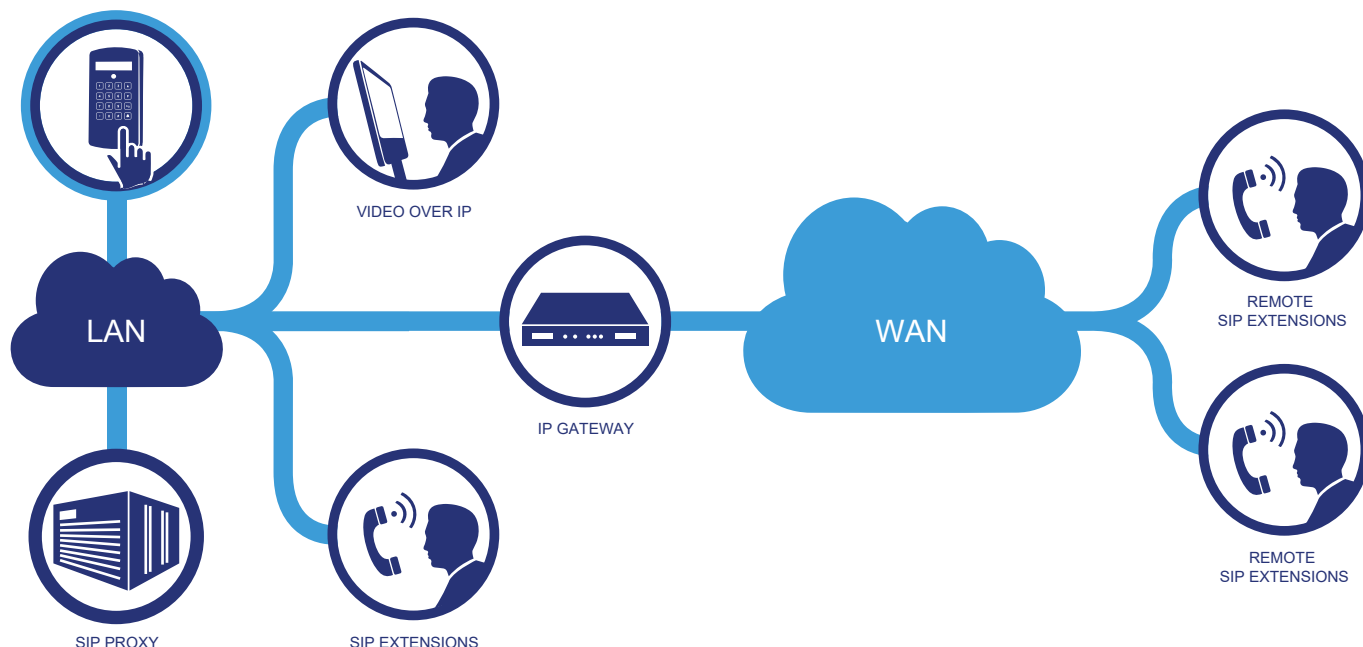

Main Features

- LED Display / Scroll company directory
- Keypad 4x4
- Direct dialing to destination
- 2 separate relays
- External Switch Buttons
- Up to 99 programmable destinations with personal door opening codes
- Door opening from remote extension
- SIP Proxy extension account
- Direct dialing to Day & Night destination
- Peer-To-Peer calls
- No Answer call forwarding
- Pure SIP HD Video call support
- RTSP and HTTP Video streaming
- Simultaneous SIP video call and Video streaming
- Network Configuration: DHCP or Static
- Web interface; HTTPS support
- Web GUI password protection
- Administrator's rights levels
- Firmware upgrade and Backup
- POE - 802.3af, Class 2
- Auto Provisioning
- Case Opening Alarm

Technical Specifications

Power supply: 5 VDC 2A or POE
 Communication interface: Ethernet RJ-45
 Relay switching current: Relays 2A Max
 VoIP protocol supported: SIP; RTP; RTCP
 Supported Audio codecs:
 G.711 PCM (μ A-Law); G.722; G.729; Speex 8/16/32 kHz; GSM
 Video Codecs: H.264; H.263-1998 (H.263+)
 Video Stream: RTSP; MPEG; HTTP
 Video Resolution: CIF; QCIF, VGA; 720p HD
 Built in, HD video camera, wide angle 130°
 Echo canceller:
 G.168-2002 Compliant with programmable echo tail of up to 128 msec.
 Echo canceller length: Up to 64 msec; Acoustic EC
 Media Encryption: SRTP
 NTP protocol support
 NAT Traversal and STUN support
 Syslog protocol support
 Speaker / Microphone Volume Web Control
 Adaptive Jitter Buffer(up to 300 msec)
 IP media features: Automatic Gain Control
 DTMF Presentation modes: RFC2833; SIP Info
 Power Consumption: Maximum Consumption: 1.1A, 5.5W
 Idle Consumption: 540mA, 2.7W
 Dimensions: 182x95x36 mm
 Weight: 0.8 kg

* Manufacturer reserves the right to change the product design and functionality.